


Mobile Lighting Tower

Long Duration Day Light in the Dark

LML10-LP

Vertical Manual Mast



Key Features

10 kw Power output

4*350W LED

7.5M Vertical Mast

Sound Proof canopy


110 hours continuous running

113L Visual Fuel tank

22 units load qty/ 40ft HQ



Vertical Manual Mast LML8-LP/LML10X-LP Specification

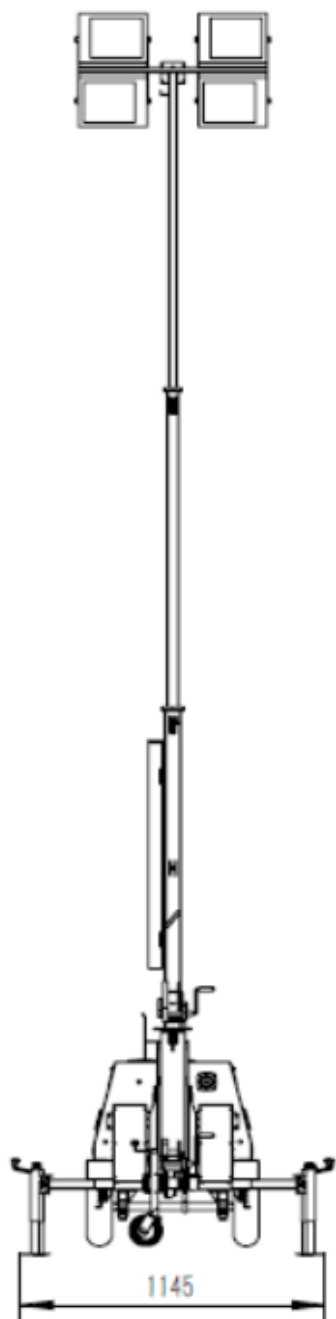

General		
Model	LML8-LP	LML10X-LP
Frequency	50HZ	60HZ
Rated Power	8kW	10kW
Voltage	230V ac	240V ac
Illumination Coverage	4000m ² 4*350W	4000m ²
Lamp	LED	4*350W LED
Mast Height	7.5M Manual	7.5M Manual
Battery Switch	Yes	Yes
Emergency stop	Yes	Yes
Controller	HGM4010CAN	HGM4010CAN
Fuel Tank Capacity	113L	113L
Operation Temp.	-25-50°C	-25-50°C
Fuel Consumption	1L/H	1.2L/H
Running Hours	113h	94h
Noise Level @7m	70dba	70dba
Dimension	2987*1309*3051	2987*1309*3051
Weight	746kg	746kg
Rotation Angle	359°	359°
Stablizers	4	4
Socket	10A*1	10A*1
Engine		
Brand	Lister Petter	Lister Petter
Model	LP311EG1	LP311EG1
RPM	1500	1800
Rated Out Put	8KW	9.5KW
Cooling Type	Water	Water
Cylinders	3	3
Bore	78mm	78mm
Stroke	78.4mm	78.4mm
Displacement	1.1L	1.1L
Intake System	Naturally Aspirated	Naturally Aspirated
Oil Pan Capacity	4.5L	4.5L
Alternator		
Brand	Sincox	Sincox
Model	SMU132D	SMU132D
Efficiency	77.50%	80%
Insulation	Class H	Class H
Exciting Type	SHUNT	SHUNT
Voltage regulation	±1%	±1%



Loading qty

24units/40ft HQ(mast dismantled)

5units/20ft GP(mast dismantled)