

CUMMINS- LEROY SOMER 200KW

60Hz/1800 r.p.m-P.F.0.8					Prime Power	Standby Power	Rated Current	
Genset	Engine	Alternator	Voltage (V)	PH	kW/kVA	kW/kVA	Amps	
FC225X-C	6CTAA8.3-G2	HCI544D	240 (220-240)	1	180/225	200/250	937.5	
		LSA46.2L6 UCI274H	380/220	3	180/225	200/250	341.9	
		TPA274L9 LSA46.2M5 UCI274H	416/240	3	180/225	200/250	312.3	
		TPA274M8 LSA46.2M5 UCI274H	440-460	3	180/225	200/250	295.2 (440V) 282.4 (460V)	
		TPA274M8 LSA46.2M3						
		UCI274G TPA274M7	480/277	3	180/225	200/250	270.6	

Ratings: All three Phase generator sets are rated at 0.8 power factor. All single-phase generator sets are rated at 0.8 or 1.0 power factor. POWERGEN reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.


Prime Power:

Available continuously at variable load in lieu of commercially purchased power for an unlimited number of hours per year in accordance with ISO8528-1, and an overload of 10% permitted for one hour in every twelve hours of operation in accordance with ISO 3046-1.

Standby Power:

Emergency Standby Power in variable load applications in accordance with ISO8528-1 in the event of a utility power failure. No overload available for this service as relevant alternators are peak continuous rated at 27°C.

Overall Dimensions (mm) & Weight (kg)

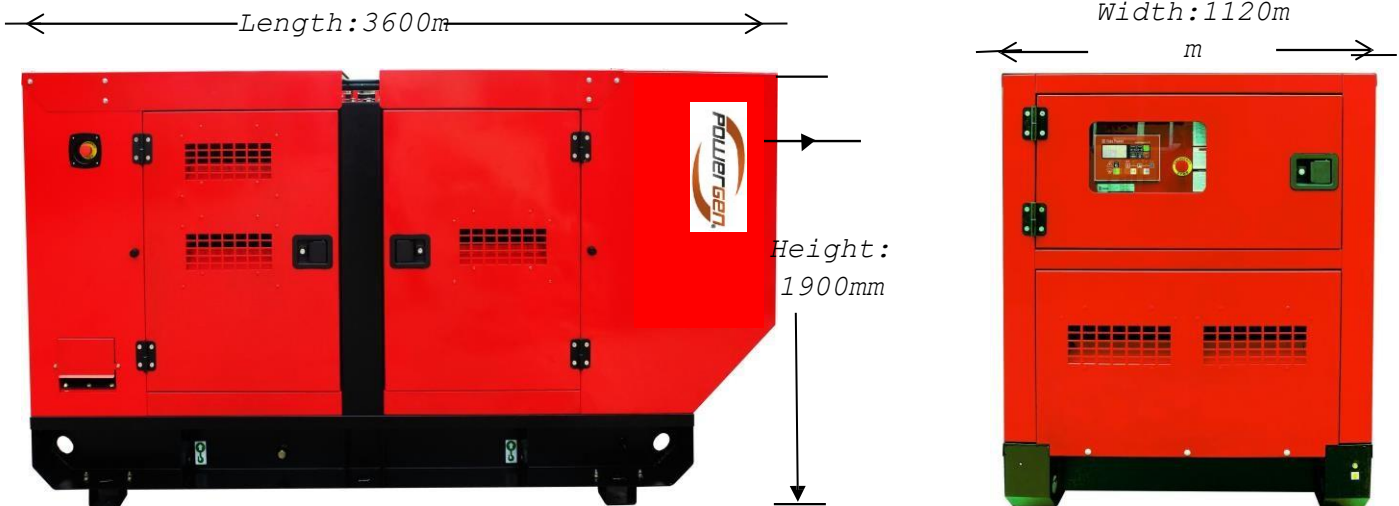

Weight (kg): 2350

Standard and optional accessories

System	Standard ●	Optional ○
Air Intake System	<ul style="list-style-type: none"> ● Standard air filter ● Air filter overload alarm 	<ul style="list-style-type: none"> ○ Air prefilter ○ Heavy air filter
Cooling System	<ul style="list-style-type: none"> ● 50°C radiator ● Low water level alarm ● Fan and belt guard 	<ul style="list-style-type: none"> ○ Antifreeze ○ Water jacket heater
Exhaust System	<ul style="list-style-type: none"> ● Discharge valve ● Stainless steel bellow ● Residential silencer ● Complete exhaust pipe ● Rain cap 	<ul style="list-style-type: none"> ○ Stainless steel silencer ○ Stainless steel exhaust pipe
Fuel System	<ul style="list-style-type: none"> ● 8 Hours integrated base fuel tank ● Standard fuel filter ● Fuel level gauge ● Fuel filling cap 	<ul style="list-style-type: none"> ○ 6 Hours double wall base fuel tank ○ Fuel-water separator ○ Oil level sensor ① ② ○ Automatic fuel top up system ①
Lubrication System	<ul style="list-style-type: none"> ● Fuel hose ● Standard oil filter ● Manual oil pump and drain 	<ul style="list-style-type: none"> ○ Oil heater ○ Lube oil level indicator
Alternator and Electric Switch	<ul style="list-style-type: none"> ● Shunt or self excited ● Class H insulation ● H class temperature rise ● DELIXI MCCB ● Terminal connection lugs (L1, L2, L3, LN) 	<ul style="list-style-type: none"> ○ Oil temperature indicator ① ○ PMG or AREP (Leroy-somer only) ○ Alternator space heaters ○ PT100 winding temperature sensors ○ Weaver AVR ○ Weaver prolapse transformer <ul style="list-style-type: none"> ○ F class temperature rise ○ 4 Pole circuit breaker with leakage protection ○ Circuit breaker - 4 pole <ul style="list-style-type: none"> ○ ABB MCCB ○ MCCB auxiliary contact and shunt tripping device
Control System	<ul style="list-style-type: none"> ● Intelligent 1.0 for 4 cylinders engine ● Intelligent 3.0 for 6 cylinders engine 	<ul style="list-style-type: none"> ○ Panel lighting
Silent / Base	<ul style="list-style-type: none"> ● Intelligent 5.0 for ECU engine ● 67-72 db(A) @ 3 meters ● 4mm -6mm Steel base ● Transportation support leg ● Single hook ● Power coating enclosure ● Anti-vibration mounting between engine /alternator and baseframe ● Emergency stop mounted outside the 	<ul style="list-style-type: none"> ○ Forklift holes ○ Enclosure color: ○ Trailer for off road or on road
Start / Charge	<ul style="list-style-type: none"> ● canopy ● Standard color: Ral 3020 ● Battery with bracket and cables ● Engine battery charger ● 3A Mains charger 	<ul style="list-style-type: none"> ○ Low temperature starting batteries ○ Battery switch ○ High current charger (10A, 20A)

Remark:

① When you need the automatic oil top up system, you have to use the electrical oil level sensor.

② You can choose either electrical oil level sensor or oil temperature sensor.

Engine

Engine specifications

Manufacture	DCEC Cummins
Engine model	6CTAA8.3-G2
Engine type	4 cycle, in-line
Engine speed	1800 r.p.m
Prime power	190kW/255hp
Standby power	210kW/281hp
Governor type	Electronic
Governor make / model	BYC P7100
Aspiration:	Turbocharged and Charge Air Cooled
Displacement	8.3
Bore * Stroke	114mm x 135mm
NO. of cylinders	6
Compression ratio	17.3:1
Engine idle speed	700-900 rpm
Piston speed	8.1 m/s
Air cleaner type	Dry

Exhaust System

Maximum back pressure	10.1 kPa
Exhaust pipe size normally acceptable	75 mm
Exhaust gas temperature	520-585 °C
Exhaust gas flow	675 Litres/sec.

Air Intake System

Maximum intake air restriction with heavy duty air cleaner	
- Dirty element	6.2 kPa
- Clean element	3.7 kPa
Recommended intake piping size	75 mm
Intake air flow	254 Litres/sec.

Lubrication System

Oil capacity (high - low)	N/A
Maximum oil temperature	121°C
Minimum required lube system capacity	
- Sump plus filters	23.8 Litres

Fuel System

Type injection system	BYC P7100 direct injection
Total drain flow (constant for all loads)	30 Litres/hou
Fuel consumption at 100% standby power	56 Litres/hou
Fuel consumption at 100% prime power	49 Litres/hou
Fuel consumption at 75% prime power	37 Litres/hou
Fuel consumption at 50% prime power	25 Litres/hou
Fuel consumption at 25% prime power	15 Litres/hou
Fuel tank capacity	8 hours

Cooling System

Coolant capacity - engine only	12.3 Litre
Standard thermostat (modulating) range	82 - 93°C
Maximum top tank temperature	
- Standby power	110 °C
- Prime power	104 °C

Electric System

Electrical system voltage	24V
Battery	Maintenance-free
Connecting cables	Available

Thermal Data

Radiated heat to ambient	29-33 kW
Heat rejection to coolant	107-117 kW
Heat rejection to exhaust	157-180 kW

Alternator

60Hz/1800R.P.M

General Data

Power factor	Cos φ = 0.8
Excitation	Shunt / Brushless

Insulation class	H
Bearing	Single
Altitude	≤ 1000 m

Ratings

Prime Power Standby Power

Brand	Alternator	Number of wires	AVR Model	PH	Voltage (V)	kW/kVA	kW/kVA
Stamford	HCI544D	12	AS440	1	240 (220-240)	184/230	N/A
Leroy-somer	LSA46.2L6	12	R250			206/257	228/285
Stamford	UCI274H	12	AS440	3	380/220	190/237.5	205/256.3
Tide	TPA274L9	12	SX460			182/228	200/250
Leroy-somer	LSA46.2M5	12	R250			175/219	194/242
Stamford	UCI274H	12	AS440	3	416/240	190/237.5	205/256.3
Tide	TPA274M8	12	SX460			178/222.5	192/240
Leroy-somer	LSA46.2M5	12	R220			184/230	202/252
Stamford	UCI274H	12	AS440	3	440-460	196/245	212/265
Tide	TPA274M8	12	SX460			186/232.5	199/249
Leroy-somer	LSA46.2M3	12	R220			182/228	204/255
Stamford	UCI274G	12	AS440	3	480/277	185.1/231.4	202.6/253.3
Tide	TPA274M7	12	SX460			184/230	197/246



Intelligent 1.0 Intelligent 3.0 Intelligent 5.0

	Intelligent 1.0	Intelligent 3.0	Intelligent 5.0	
Viewable parameters	Phase voltage	3	3	
	Wire voltage	3	3	
	Current	Instrument	3	3
	Frequency	●	●	●
	Active power	×	●	●
	Reactive power	×	●	●
	Apparent power	×	●	●
	Power factor	×	●	●
	Electric energy metering	×	×	●
	Generator protection	Abnormal voltage	●	●
Over-current warning		×	●	● Over
current protection		×	●	● Over
Frequency protection		●	●	● Short
circuit protection		MCCB	MCCB+○	MCCB+○
Engine figure	Oil pressure	●	●	●
	Water temperature	●	●	●
	Fuel level	○	○	○
	Speed	●	●	●
	Battery voltage	●	●	●
	Elapsed time	●	●	● Low
Engine protection	oil pressure warning	●	●	● Low oil
	pressure protection	●	●	● High
	temperature warning	●	●	●
	High temperature protection	●	●	●
	Overspeed warning	●	●	●
	Overspeed protection	●	●	●
	Charge fault	●	●	●
Function	Remote start-stop	●	●	●
	AMF	●	●	●
	Programmable input	3	7	7
	Programmable output	6	7	7
	Port extension	USB	○	○
	Remote monitoring	×	○	○
	Communication port	×	○	○ CAN
	● ○ ● Start/Stop time control			×
	×	● Maintenance tips	×	×
	● Fault record	×	×	●
	Multi-language function	×	●	●
Remark:	● Standard	○ Optional	×	NA

(Safety Installation: Detect - Control – Switch System)

POWERGEN offers not only a changeover switch but also an integrated mains detection and switch system for your 24 Hour Power Protection. The system enables automatic start-up and operation of the generating set in the event of a mains power failure, overvoltage or loss of phase; and also mains automatic re-transfer once it come back. The system has a wide application such as hospital, bank, telecom, air port, broadcasting station and hotels.

System Advantages

- Automatically transfer and re-transfer load from main power to gen-power without operator intervention.operation. (Both automatic and manual)
- ATS Controller (AMF function), seamless integration with Intelligent 5.0
- Available from 32 – 3200A, better protection for 4 pole switch.
- Available in standard, bypass isolation and service-entrance configurations.
- Configurable in open, closed and programmed transition operating modes.
- Designed to interface seamlessly with TIDE POWER generators and switchgear.
- Drip Proof IP23 Enclosure.
- Easy Installation: Wall-mounted & Floor standing
- Comes fully loaded with the technology to do the job.



Rated Current	Breakey Type			
	A	Chinese	ABB	Socomec
32	x		B	x
63	A		B	B
80	x		x	B
100	A		B	B
125	x		B	B
160	B		B	B
200	x		B	x
250	C		B	B
300	x		x	x
315	x		C	x
400	C		C	C
630	C		D	D
800	D		D	D
1000	D		D	D
1250	D		D	D
1600	D		D	E
2000	E		E	E
2500	E		E	E
3200	E		x	E

Dimensions : mm

A : 400x200x500

B : 500x300x650

C : 600x400x1200

D : 800x600x1400

E : 1000x800x1600

Controller

StandardParameters

- Gen phase voltage
- Generator frequency
- Engine speed
- Battery voltage
- Engine running hours counter
- Engine temperature
- Oil pressure



WarningandShutdownAlarms

- Low oil pressure
- High engine temperature
- Over speed
- Under speed
- Start failure
- Stop failure
- Emergency stop
- High/low battery voltage
- Aux. shutdown alarm
- Aux. Warning